

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60122637H

Customer pos. no.:

Model :

VERTY NOVA 400 M

Pump data

Free passage : 5 mm
Pressure rating :
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature :

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,00234 MPa



Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body Technopolymer
Impeller Noryl
Motor casing Stainless Steel AISI 304
Motor shaft AISI 416 X12 CrS 13 UNI EN 10088-1
Float Technopolymer
O-Ring NBR 70
Filter Technopolymer

Curve tolerance according to ISO 9906

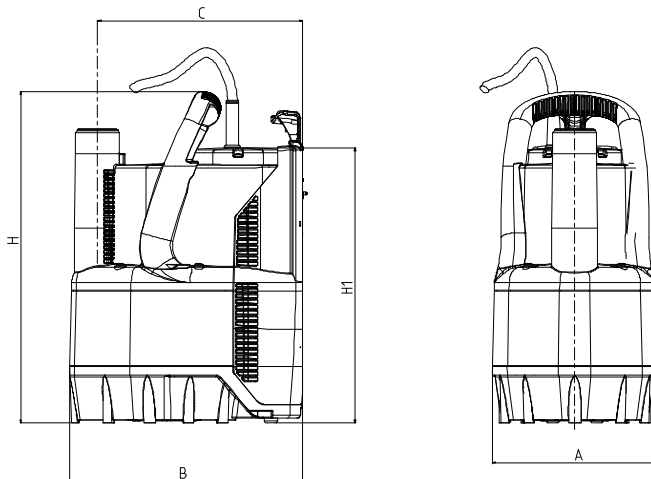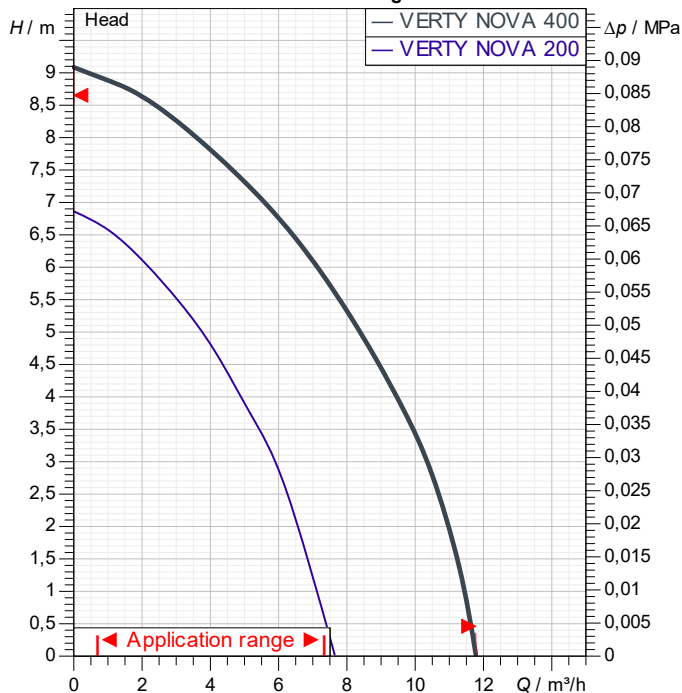

Motor data

Weight : 5,1 kg

Dimensions in mm

A	158				
B	225				
C	200				
D	33				
H	318				
H1	265				

Pump connection

Suction side : /
Discharge side : 1" 1/4 GAS / --


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

VERTY NOVA 400 M

Curve tolerance according to ISO 9906

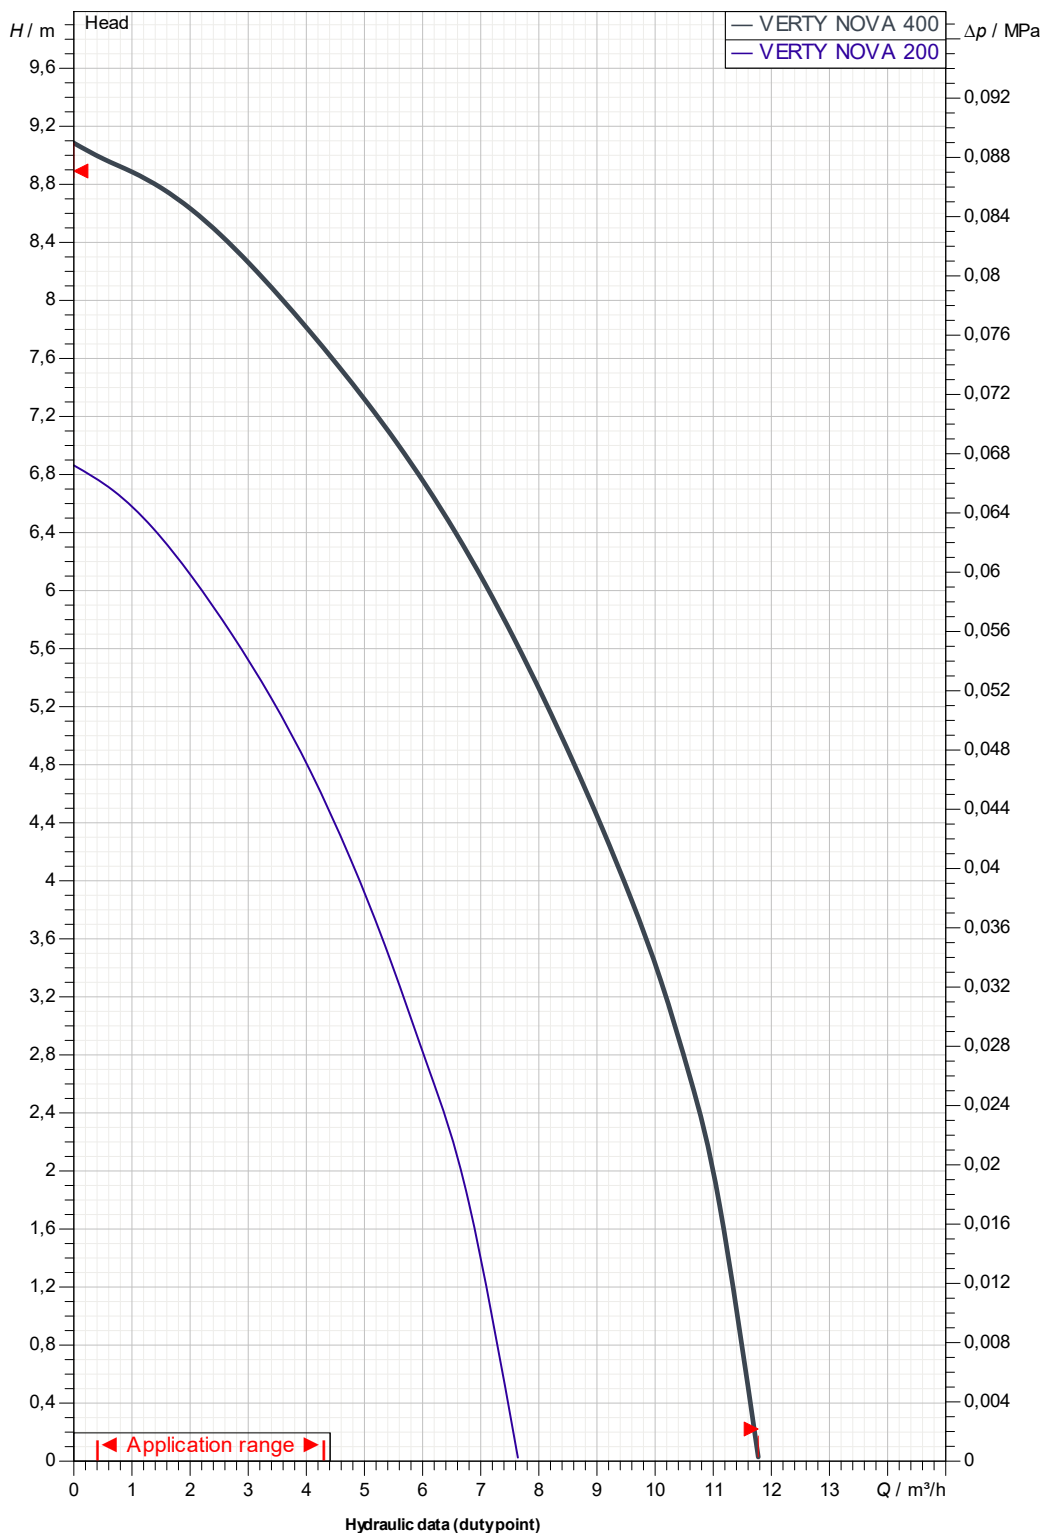

Suction side :

Discharge side :

1" 1/4 GAS

--

Flow :

Head :

Rated speed :

2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2024-11-07



DIMENSIONAL DRAWING

2024-11-07

Page 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

VERTY NOVA 400 M

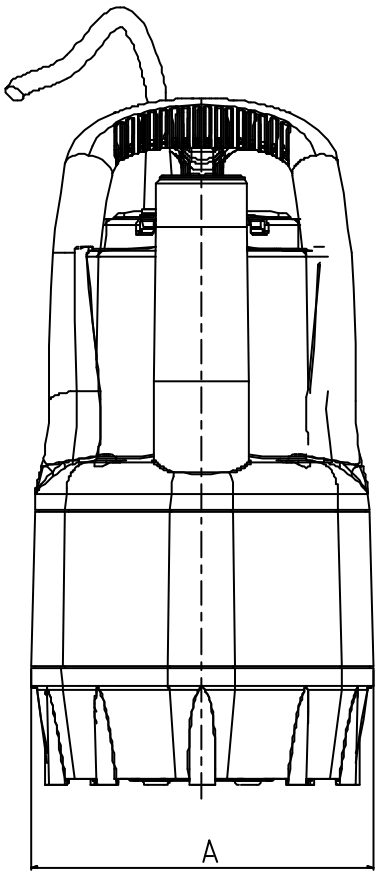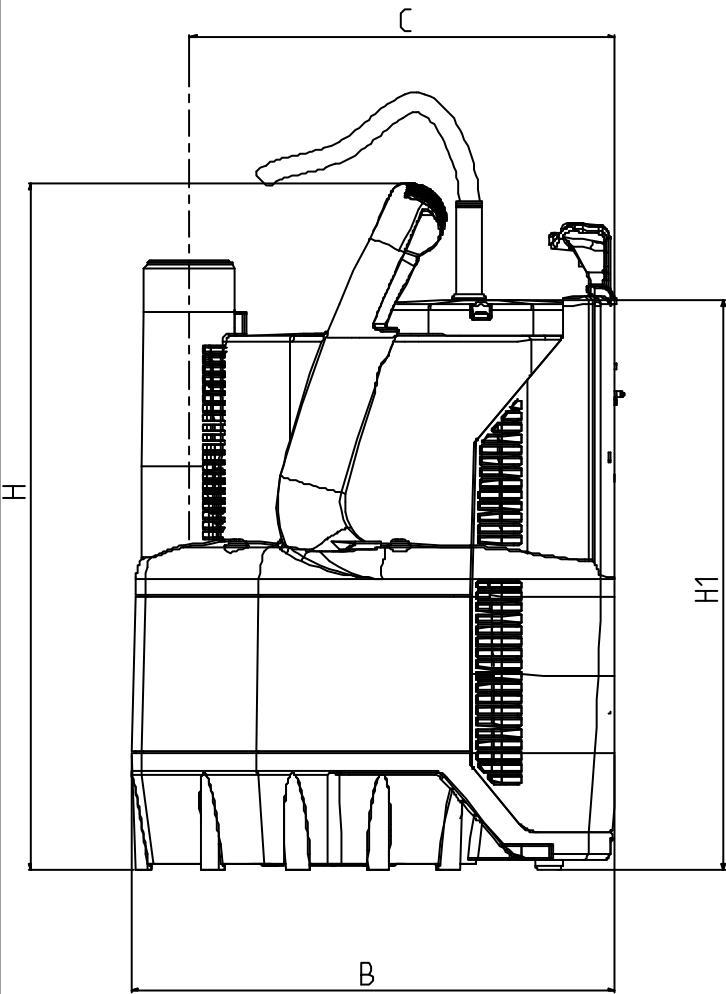

Dimensions in mm						Pump connection
1	A	158				Suction
2	B	225				
3	C	200				
4	D	33				Discharge 1" 1/4 GAS --
5	H	318				
6	H1	265				
7						
8						
9						
10						
11						
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_ID		OWNER_	ISSUE_DATE 2024-11-07